

HUMAN iMPACT

Glazing

Bath-
rooms






We need to pay particular attention when glazing a bathroom or ensuite as these areas are more prone to Human Impacts due to them being in wet areas.

Because of this the Australian Standards AS1288 deems that glass used in these areas needs to be A grade safety glass if glazed within 2000m of floor level, this includes all glass shelves and fittings.

Ordinary annealed glass, including mirror may be used providing it is fully backed or completely adhered to a solid material in such a way that should it break all the pieces will remain in situation. This limits the severity of any injuries that may be incurred should the glass break.

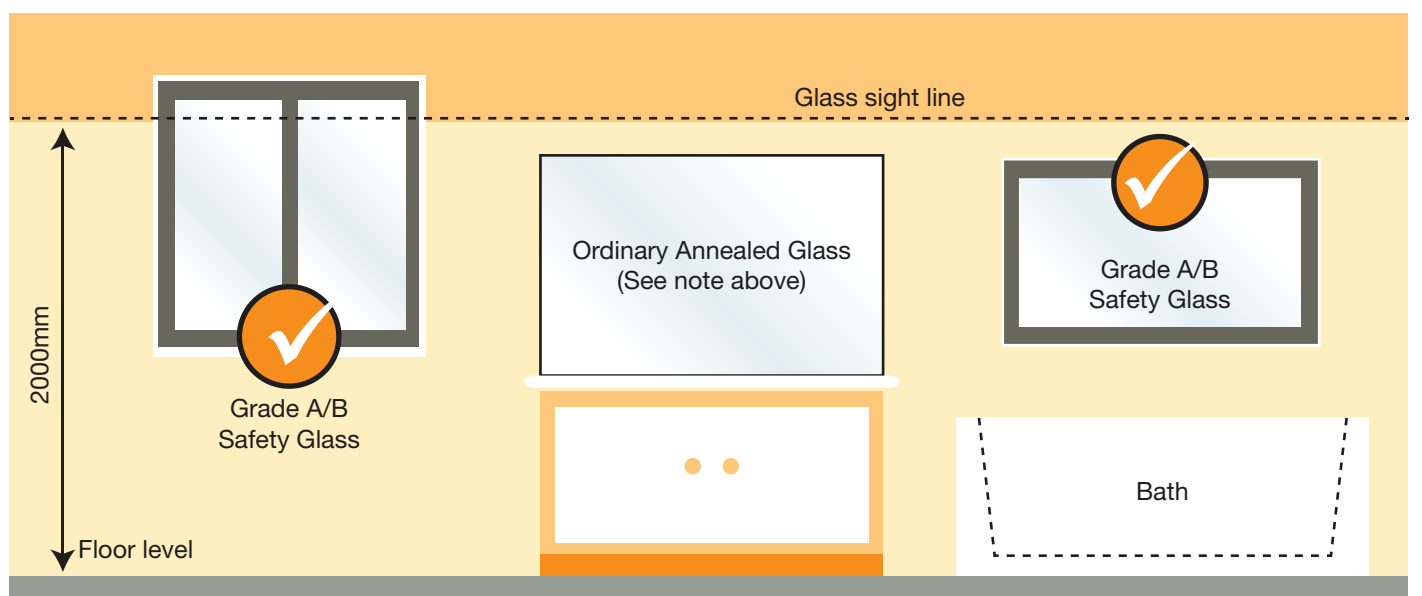

Ordinary annealed glass may also be used behind a vanity unit providing the fixed vanity or bench has a height of not less than 760mm and a width of 300mm that extends to the full width of the glass or mirror.





Frameless shower doors or panels must be glazed with Grade A toughened or toughened laminated safety glass with a minimum thickness of 6 mm, in accordance with AS 1288

Partly framed glazing, Semi Frameless shower screens with one unframed edge or two opposite unframed edges, must also be glazed with Grade A toughened safety glass or toughened laminated safety glass in accordance with AS 1288



You
Think
We
Create

Diverse Glazing Group



21 Roper Street, O'Connor | 57 Gordon Road, Mandurah Ph: (08) 6149 1299

 diverseglazinggroup.com.au

 enquiry@diverseglazinggroup.com.au